

This reel is fitted with stainless steel gears giving 2½ to 1 ratio and designed for High speed spinning.


The reel is fitted with slipping handle plate clutch which is adjustable to operators liking with spanner supplied. Adjust top hexagon nut only.

Lubricate spindle and spool with light grease or oil in knurled grease cap on back of spindle.

Grease gear teeth only with underwater grease.

To remove spool:-- Use spanner supplied, slack hexagon nut & turn only and slide outwards to unmesh gears. Remove knurled spindle screw on front of spindle and remove spool complete.

Replace by reverse procedure, mesh gears and lock firmly but DO NOT STRAIN.

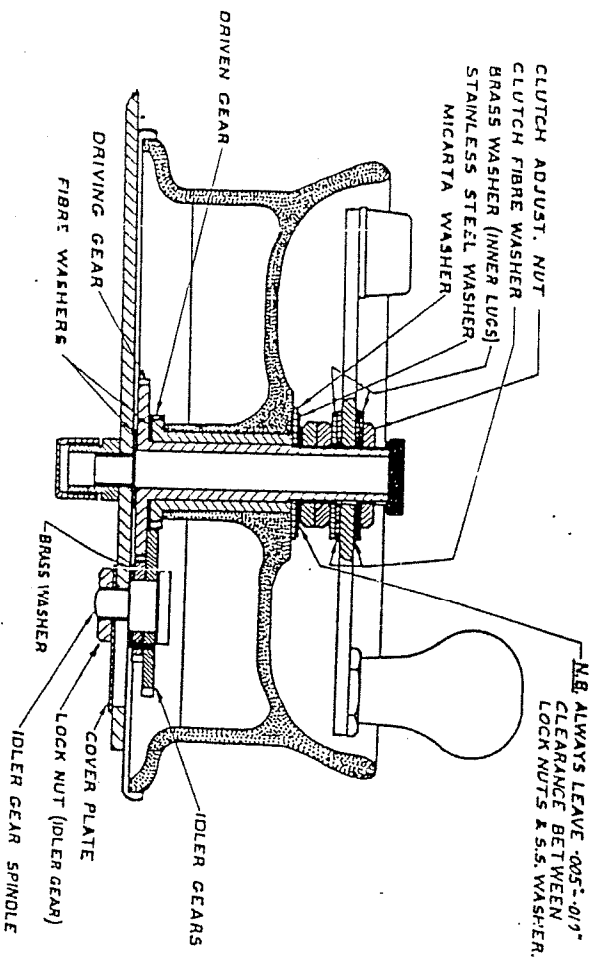

ALVEY MODEL 650GR